

Fig. 1

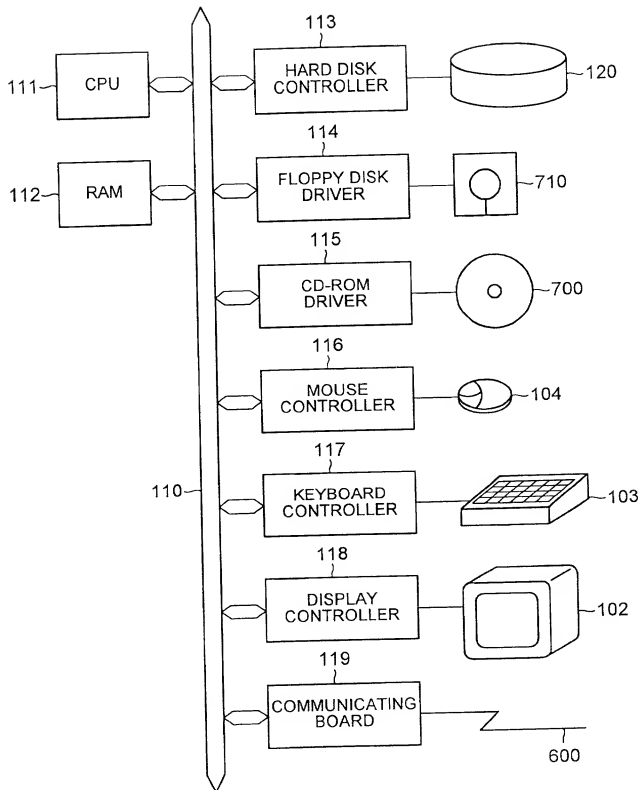


Fig. 2

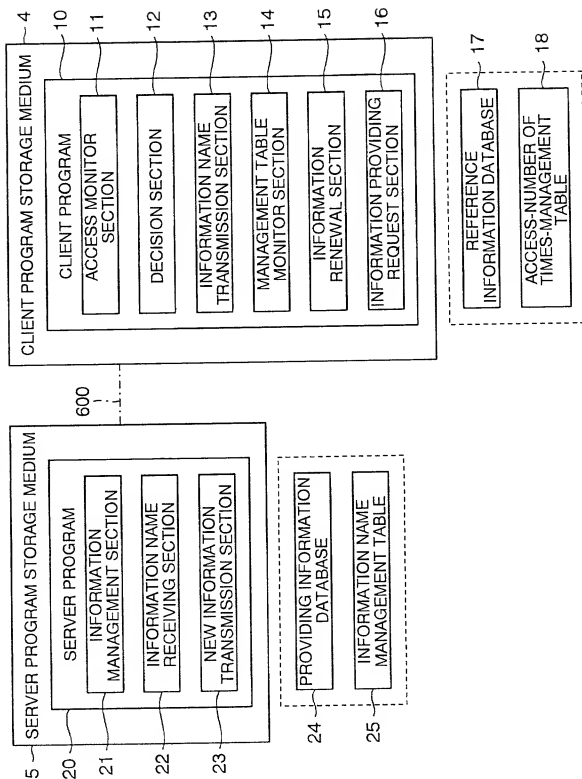


Fig. 3

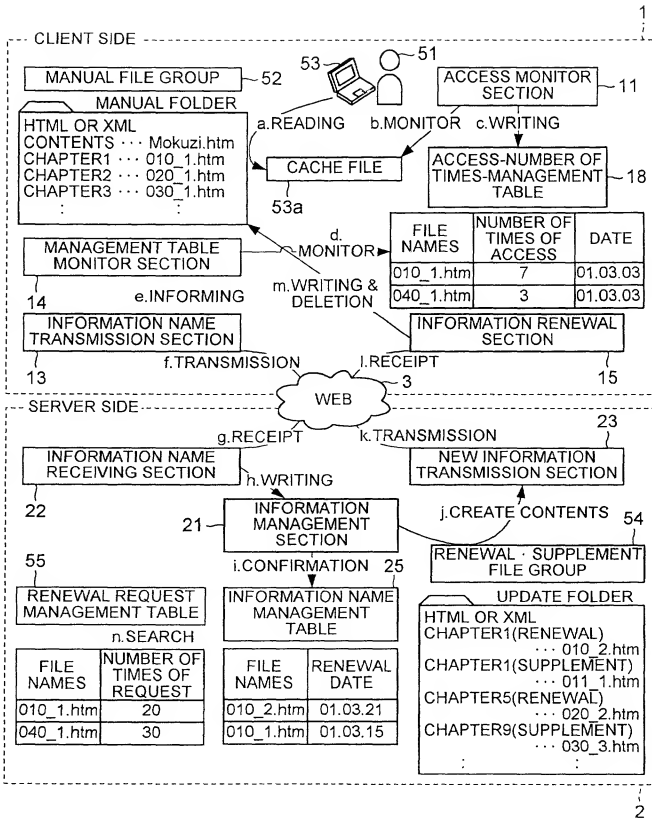


Fig. 4

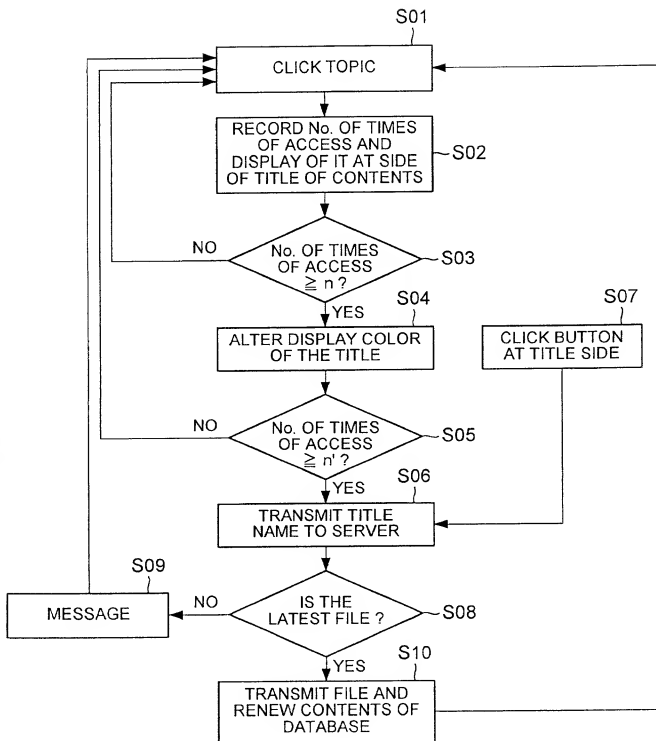


Fig. 5

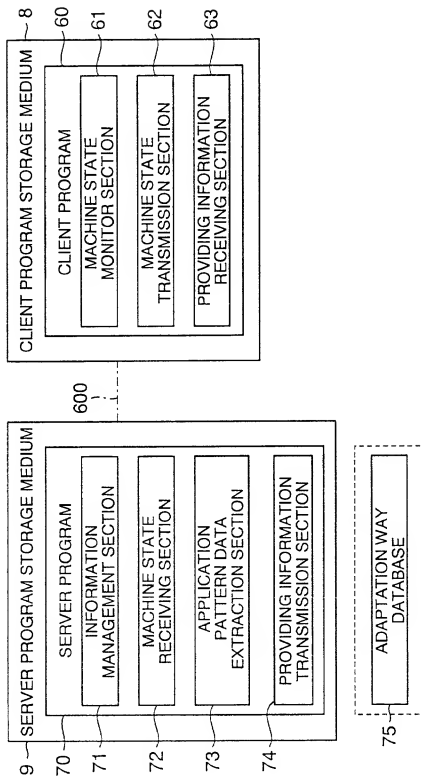


Fig. 6

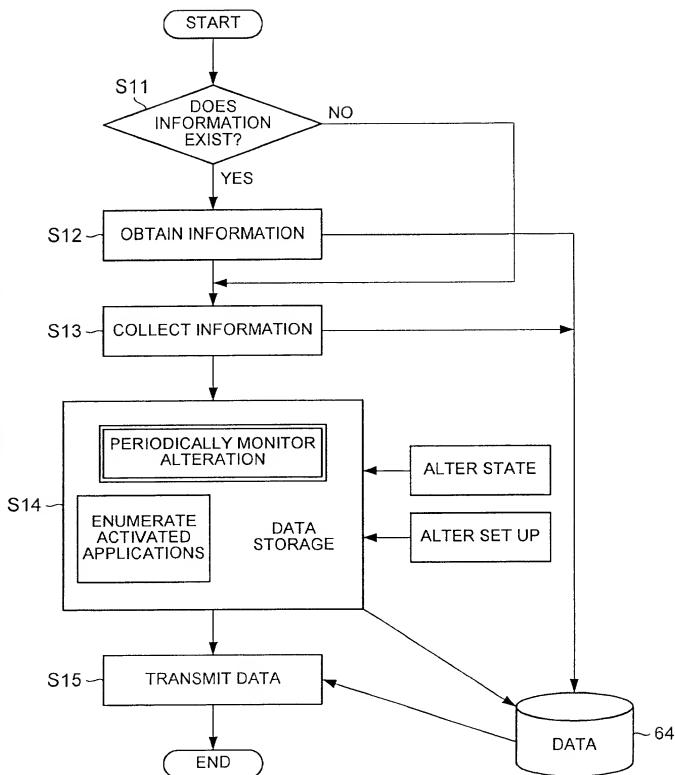


Fig. 7

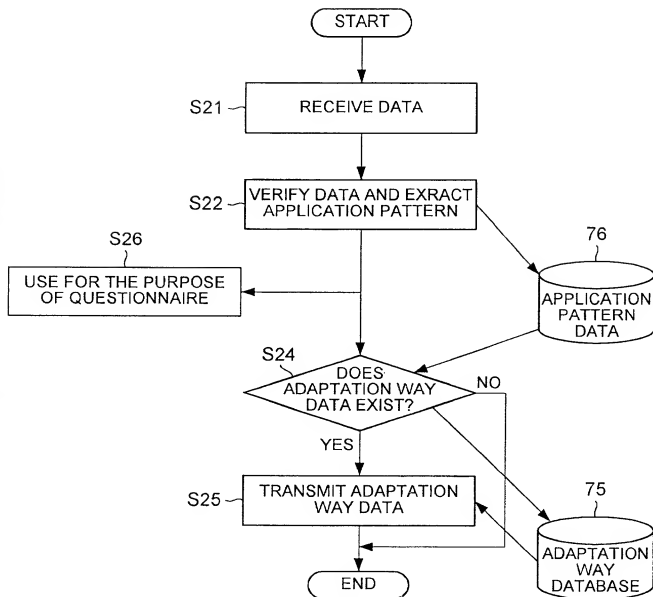


Fig. 8



## AS TO APPLICATION

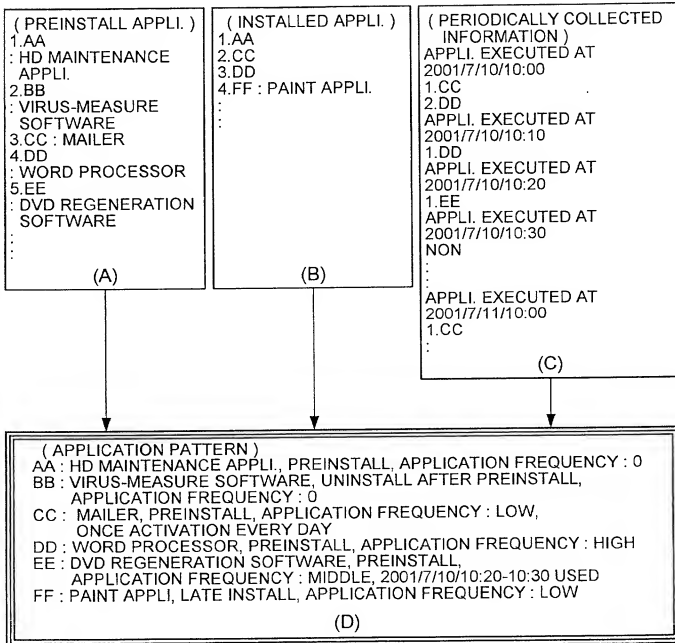


Fig. 9

## AS TO ENVIRONMENT SETTING

( SET AT THE TIME OF  
FORWARDING )  
SCREEN SET :  
1024×768  
FULL COLOR  
SOURCE SET :  
ON AC SOURCE  
CONNECTION :  
TURN OFF MONITOR  
SOURCE AFTER 15  
MINUTES  
TURN OFF HD  
SOURCE AFTER 20  
MINUTES  
STANDBY AFTER 25  
MINUTES  
ON BATTERY USE :

(A)

( AT THE TIME OF  
STARTING OF  
CLIENT PROGRAM )  
SCREEN SET :  
1280×1024  
FULL COLOR  
SOURCE SET :  
ON AC SOURCE  
CONNECTION :  
NO SET OF POWER  
SAVING  
ON BATTERY USE :  
NO SET OF POWER  
SAVING

(B)

( DETECTED  
ALTERATION )  
2001/07/11/10:20  
ALTER SCREEN SET  
TO 800×600  
2001/07/11/10:30  
ALTER SCREEN SET  
TO 1024×768

(C)

( APPLICATION PATTERN )

SCREEN SET :  
USUALLY USE IT IN 1024×768, IN SOME CASE, USE IT IN 1280×1024  
2001/07/11/10:20-10:30 : USE IT IN 800×600  
SOURCE SET :  
ON AC SOURCE CONNECTION, AND ON BATTERY USE, NO SET OF POWER  
SAVING  
:  
:  
:

(D)

Fig. 10

AS TO WORKING STATE

(A)

( FIRST OBTAINING )  
 · PRINTER CONNECTION  
 · ADSL MODEM CONNECTION  
 · HD 40GB MANY FILES SEGMENTED.  
 ·  
 ·

(A)

( MONITOR MESSAGE )

2001/7/10/8:00  
 SOURCE TURN-ON  
 SOURCE STATE : BATTERY  
 NETWORK CONNECTION  
 2001/7/10/12:00  
 STANDBY  
 2001/7/10/18:00  
 RESUME  
 SOURCE STATE : AC SOURCE  
 BATTERY RESIDUE : 10%  
 NETWORK LOG-OFF  
 ·  
 ·


(B)

( APPLICATION PATTERN )  
 SOURCE STATE : TIME WORKING WITH BATTERY IS LONG.  
 NETWORK : TIME IN CONNECTION IN ALWAYS CONNECTABLE ENVIRONMENT  
 PRINTER : WHILE IT IS CONNECTED, APPLICATION FREQUENCY IS LOW.  
 HD : MANY FILES SEGMENTED.  
 ·  
 ·

(C)

Fig. 11

10062772.020502

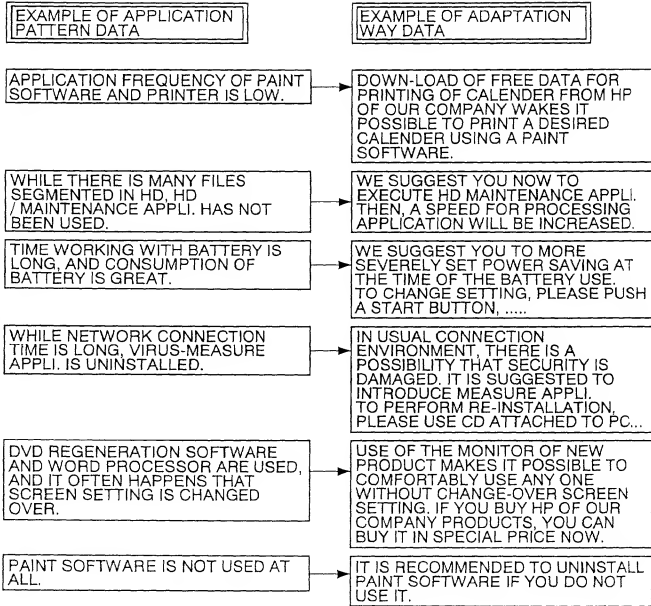

(A)

(B)

Fig. 12